



→ Introductions

This isolator converts the RS485 digital signals to RS232C serial signals.

RS485 Input Isolator

Nanjing New Power Electric Co., Ltd.

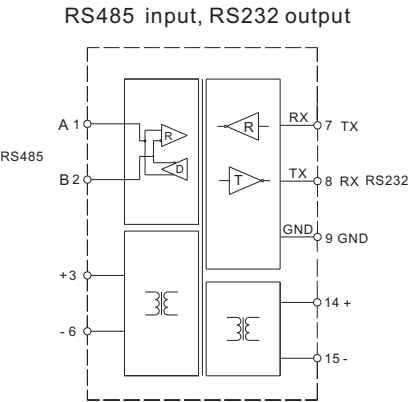



Rotary switch	Distribution
S0	5 V DC, 100 mA
S1	6 V DC, 100 mA
S2	8 V DC, 50 mA
S4	9 V DC, 50 mA
S8	12 V DC, 50 mA

→ Attention

- The devices degree of protection is IP 20 and must be protected from undesirable ambient conditions (waterproofing, small foreign objects). It is suitable for installation in the control room or high density field cabinet, DIN 35 mm int 0