



$\leq 550\Omega$ $< [(U-3)/0.02]\Omega;$



-20

$\leq 500\text{ ms}$

$\geq 1500\text{ V AC}$ (Input/Output/Power supply)
 $\geq 100\text{ M}\Omega$ (Input/Output/Power supply)

(25°C±2°C,

IEC 60584-1				$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
				$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
				$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
				$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
				$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$
		-50	500	$\pm 0.5^{\circ}\text{C}; \geq 500$	$\pm 0.1\% \text{ F.S.}$
		-50	500	$\pm 0.5^{\circ}\text{C}; \geq 500$	$\pm 0.1\% \text{ F.S.}$
			500	$\pm 0.5^{\circ}\text{C}; \geq 500$	$\pm 0.1\% \text{ F.S.}$
	W5Re-W26Re	~2315°C	500	$\pm 0.5^{\circ}\text{C}; \geq 500$	$\pm 0.1\% \text{ F.S.}$
ASTM E988-96	W3Re-W25Re	~2315°C	500	$\pm 0.5^{\circ}\text{C}; \geq 500$	$\pm 0.1\% \text{ F.S.}$
GOST R8.585				$\pm 0.3^{\circ}\text{C}; \geq 300$	$\pm 0.1\% \text{ F.S.}$

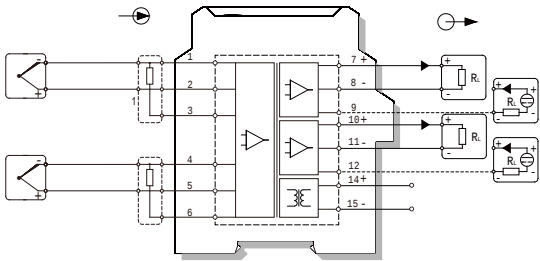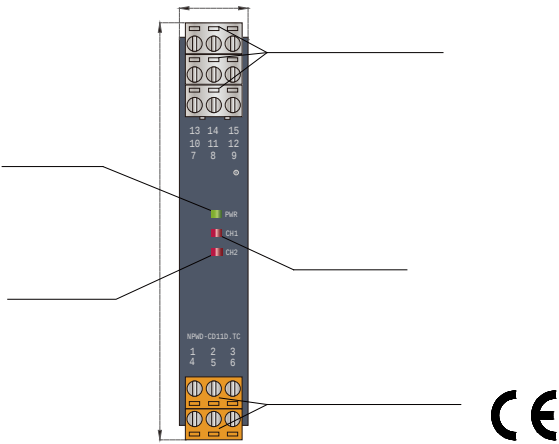

2	1 ~ 5 V
4	0 ~ 5 V
5	0 ~ 10 V