


NPEXA-H61A1P2

4 ~ 20 mA、

NAMUR

1

PC

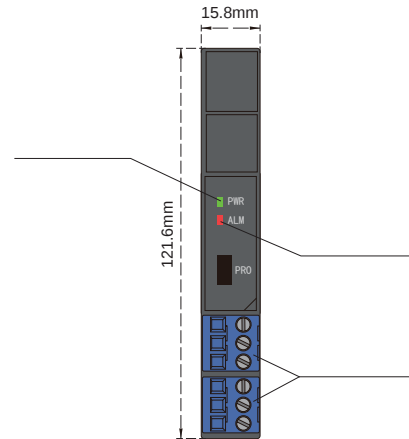

18V DC 32V DC

1.8W 24V

30V

2V

0.1Hz~100kHz

24V

≤ 20mA

0.1Hz~10kHz

8.2V

8mA

0.1Hz~10kHz

PNP NPN

NAMUR

1 4 20mA

2 :

1 $R_L \leq 500\Omega$

2 : 0.5A/35V DC

± 0.1%F.S.

≤ 0.01%F.S./

≤ 500ms

0 ~ 9999s

0 ~ 9999s

IEC 61326-3-1

≥ 2500V AC

≥ 500V AC

≥ 100MΩ / /

-20 +60

-40 +80

15.8mm× 121.6mm× 104.8mm


LED

LED

0~22mA

0 1 2 IIA IIB

II C T4 T6

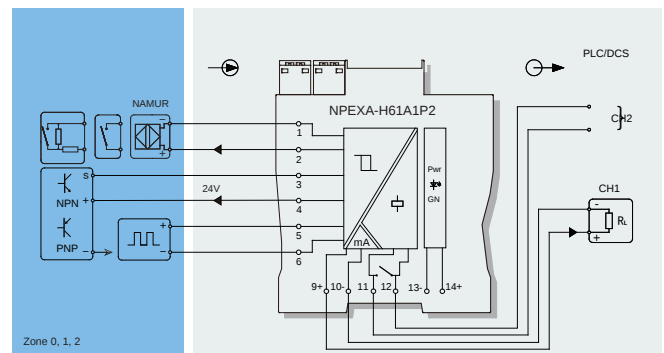

* 9+, 10-

(NEPSI)

[Ex ia Ga] II C

(Um) 250V

(1 2)

Uo=10.5V, Io=13mA, Po=35mW, Co=1.68μF, Lo=100mH

(5 6)

Uo=10.5V, Io=6mA, Po=16mW, Co=1.68μF, Lo=700mH

(3 4 6)

Uo=28V, Io=93mA, Po=651mW, Co=0.08μF, Lo=4.2mH

NPEXA-H6 | A1P2

1

1	4~20mA
2	1~5V
3	0~10mA
4	0~5V
5	0~10V
6	0~20mA