


NPFSR-K122AMD

SQS

2NO+2NC

K

1002

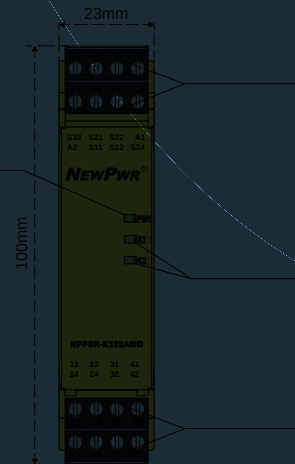

24V AC/DC

0.85 ~ 1.1

50Hz ~ 60Hz

≤ 2.2W/24V DC, ≤ 5.4VA/24V AC

≤ 50mA/24V DC

≤ 15Ω

PNP

2NO+2NC

AgSnO₂+0.2μmAu

AC-15: 5A/230V, DC-13: 5A/24V

10A gL/gG(NO), 6A gL/gG(NC)

: ≤ 300ms, : ≤ 150ms

: ≤ 30ms, : ≤ 100ms

: ≤ 30ms, : ≤ 100ms

20ms

IEC/EN 60947, IEC 61326-3-1,

IEC/EN 61000-6-2, IEC/EN 61000-6-4

250V AC

6000V(1.2/50us)

1500V AC, 1 min

IEC 60947-1

10Hz ~ 55Hz, 0.35mm

III

2


IP20

-20°C ~ +60°C

-40°C ~ +80°C

≤ 2000 m

10×10⁶ cycles

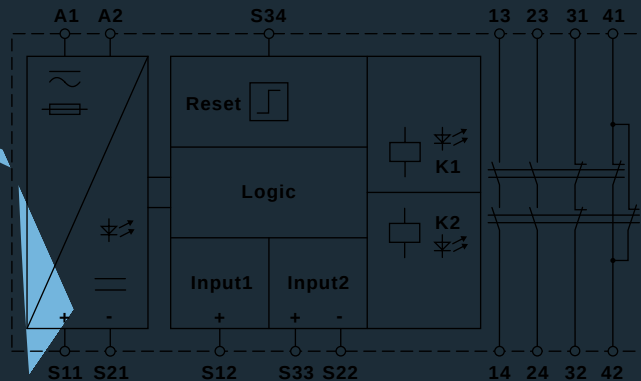

PLc,	ISO 13849
Cat.4,	ISO 13849
20 ,	ISO 13849
99%,	ISO 13849
164 ,	ISO 13849
68,	ISO 13849
SIL3,	IEC 61508
SIL CL3,	IEC 62061
1,	IEC 62061
≥ 99%,	IEC 62061
1.29×10 ⁻⁵ /PTI=20	IEC 62061
1.49×10 ⁻¹⁰ 1/h,	IEC 62061
0,	IEC 60204