



SIL3
IEC 61508

简介

NPFSR-K52D DO

230VA

IEC 61508 SIL3 SC3

SIS ESD

- Fail-safe
-
-
-
-

技术参数

16V~32V DC 24V DC
≤1.4 W/24V DC/

≤55mA/24V DC/
≤4ms

≤15Ω

DO

2NO
AgSnO₂+0.3μmAu
2A/230V AC 2A/30V DC
2.5A/

数

≤20ms
≤20ms
≤10Hz

境 数

IEC/EN 60947 IEC 61326-3-1

IEC/EN 61000-6-2 IEC/EN 61000-6-4

250 V AC

6000V (1.2/50μs)

1500V AC 1 min

IEC 60947-1


10Hz~55Hz 0.35mm

III

NPFSR-K52D
DO




功能框图

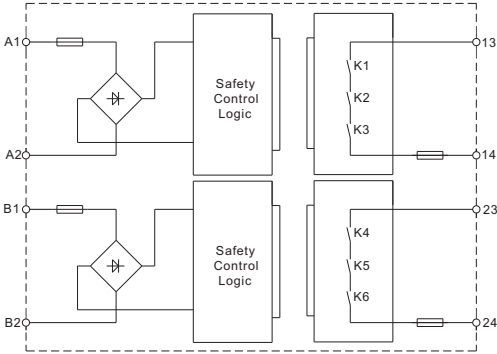


外形结构

× × : 23mm×100mm×115mm



Nanjing New Power Electric Co., Ltd.

应用示例

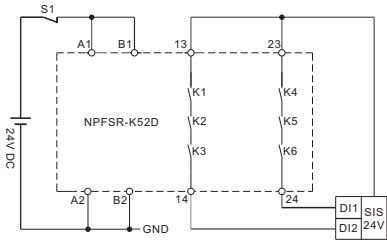

○

→ 面板显示

- **OUT1:** 1 () 1
- **OUT2:** 2 () 2

→ 注意事项

- IP20 ()
- IEC 60664-1 2
- IEC 61000-4
-
-
-
-
-
-