

NPFSR-K131MD


3X 3NO+1NC
3X 3NO+1NC



Technical Specifications

Rated Voltage	24V AC/DC
Rated Current	0.85 ~ 1.1
Rated Frequency	50Hz ~ 60Hz
Rated Power	≤ 2.2W/24V DC, ≤ 5.4VA/24V AC
Rated Current	≤ 50mA/24V DC
Rated Resistance	≤ 15Ω
Rated Voltage	3NO+1NC
Rated Current	3NO+1NC
Rated Voltage	AgSnO ₂ +0.2μmAu
Rated Current	AC-15: 5A/230V, DC-13: 5A/24V
Rated Power	10A gL/gG(NO), 6A gL/gG(NC)
Rated Voltage	≤ 150ms
Rated Current	: ≤ 30ms, : ≤ 100ms
Rated Current	: ≤ 30ms, : ≤ 100ms
Rated Current	20ms
Rated Current	IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
Rated Current	250V AC
Rated Current	6000V(1.2/50us)
Rated Current	1500V AC, 1 min
Rated Current	IEC 60947-1
Rated Current	10Hz ~ 55Hz, 0.35mm
Rated Current	III
Rated Current	2
Rated Current	IP20
Rated Current	-20°C ~ +60°C
Rated Current	-40°C ~ +80°C
Rated Current	≤ 2000 m
Rated Current	10×10 ⁶ cycles

Internal Structure

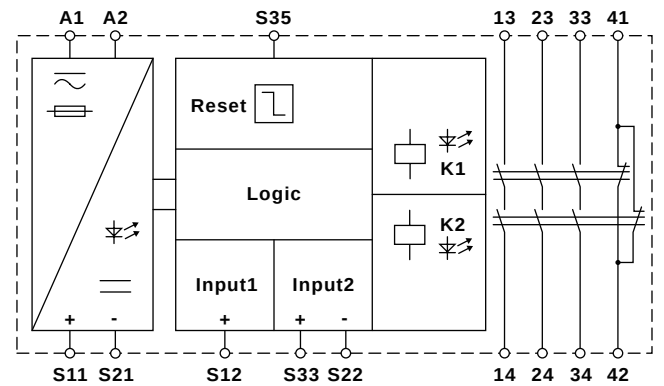

Performance Data

PLc,	ISO 13849
Cat.4,	ISO 13849
20,	ISO 13849
99%,	ISO 13849
164,	ISO 13849
68,	ISO 13849
SIL3,	IEC 61508
SIL CL3,	IEC 62061
1,	IEC 62061
≥ 99%,	IEC 62061
1.29×10 ⁻⁵ /PTI=20	IEC 62061
1.49×10 ⁻¹⁰ 1/h,	IEC 62061
0,	IEC 62024