




NPEXA-H01

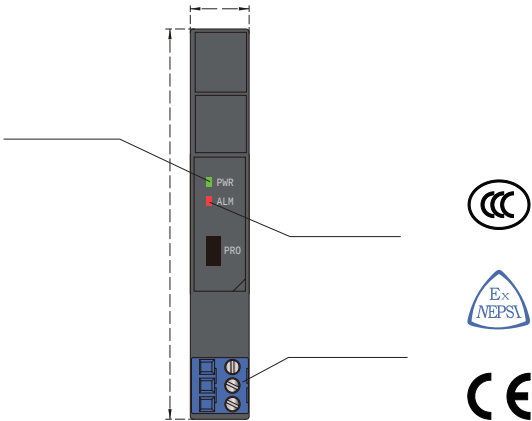


≤ 20Ω /

≤ 500Ω

0.01%F.S./
≤ 1s

≥ 2500V AC
≥ 500V AC
≥ 100MΩ / /

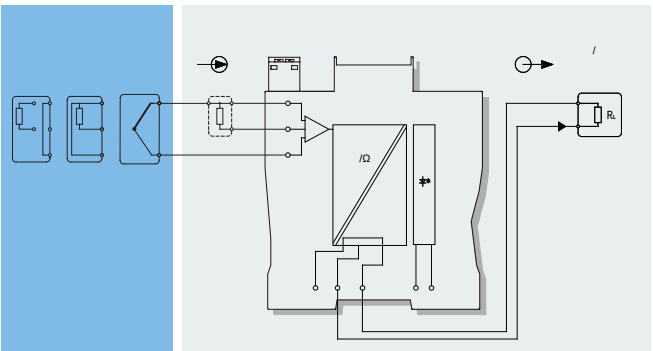

Co=12μF
Co=151μF
Co=700μF

			/
ASTM E988-96			≥300 ±0.1% F.S.
			≥300 ±0.1% F.S.
			≥300 ±0.1% F.S.
			≥300 ±0.1% F.S.
			≥300 ±0.1% F.S.
			≥500 ±0.1% F.S.
			≥500 ±0.1% F.S.
			≥500 ±0.1% F.S.
			≥500 ±0.1% F.S.
			≥500 ±0.1% F.S.
	Pt100(α=0.00385)		≥100 ±0.1% F.S.
	Pt100(α=0.00391)		≥100 ±0.1% F.S.
	Cu50(α=0.00428)		≥100 ±0.1% F.S.
	Cu100(α=0.00428)		≥100 ±0.1% F.S.
	Cu50(α=0.00426)		≥100 ±0.1% F.S.
	Cu100(α=0.00426)		≥100 ±0.1% F.S.